


PROJECTOR LIFT

CPL SERIES

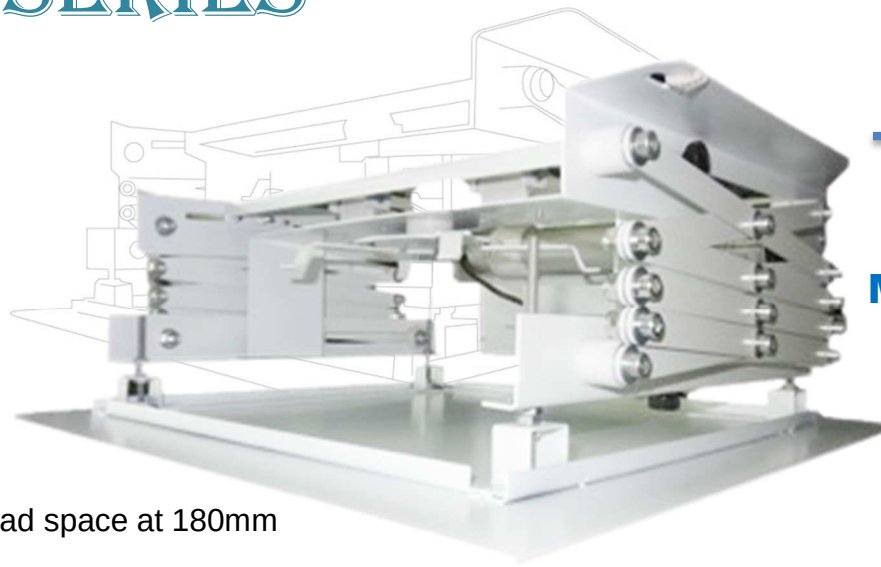

Slim

Minimum Bulkhead space at 180mm only

Silent

Driven by Synchronous Motor

Total Control


RF remote control, plus Central Control and 12V trigger.

Safe

Emergency stop to isolate all input signal for safety maintenance

Adjustable

Come with universal joint projector mount for angle adjustment

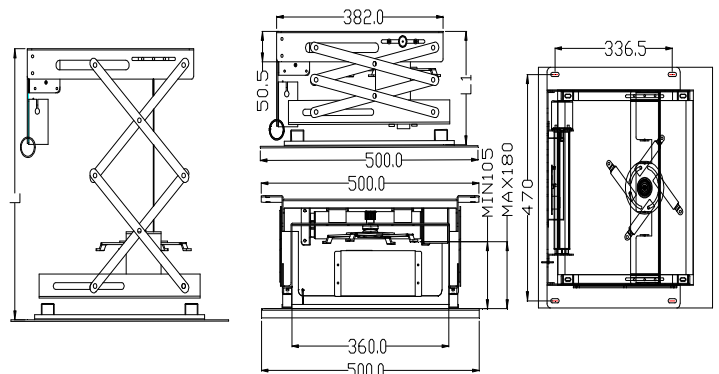

Model	CPL640	CPL860	CPL1000
Min. Size of lift(Fold up),mm	500x500x180(L1)	500X500X200(L1)	500X500X220(L1)
Max. Size of lift(Extended),mm	500x500x810(L)	500X500X1050(L)	500X500X1210(L)
Maximum Travel, mm	640mm	860mm	1000mm
Travel Duration, sec	22s	33s	40s
Minimum distance for decor ceiling, mm	180mm	200mm	220mm
Maximum Projector Dimension, mm	360 x 336 x 180mm		
Bottom Plate size, mm	500x500		
Maximum Loading Capacity, kg	12 kg		
Rated voltage, V	110-120V or 220-240V		
Power consumption, W	60W		
Overload Protection	Fuse		
Motor	SYNCHRONOUS MOTOR		
Control Method	RF/Central Control/12V Trigger/panel		
Limit Adjustment	By Limit Switch		
Safety Protection	Emergency Stop Button		
Tilt	±20°		
Roll	±20°		
Color	White		
Packing Dimension, mm	572 x 585 x 244.5mm		
Net Weight, kg	14.0 kg	14.3 kg	14.6kg
Gross Weight, kg	15.5 kg	15.8 kg	16.1kg



Vega MFG. Ltd.

21/F, Wyler Centre Phase II, 192-200 Tai Lin Pai Road, Kwai Chung, New Territories, Hong Kong.

T +852 2310 1138

F +852 2310 2068

generalm@vegamfg.com.hk

www.vegamfg.com.hk