

# PROJECTOR LIFT

## SX SERIES

### Silent

Driven by Synchronous Motor

### Total Control


RF remote control, plus Central Control and 12V trigger.

### Safe

Emergency stop to isolate all input signal for safety maintenance

### Adjustable

Come with universal joint projector mount for angle adjustment

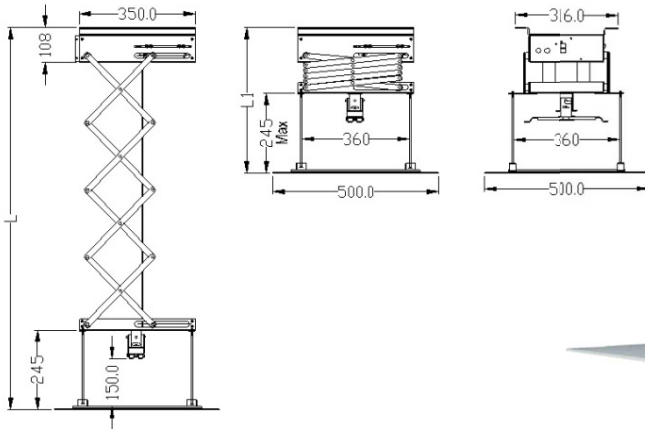

Model	SX080	SX100	SX150	SX200
Min. Size of lift(Fold up),mm	350x316x420(L1)	350X316X440(L1)	350X316X480(L1)	350X316X530(L1)
Max. Size of lift(Extended),mm	350x316x1290(L)	350X316X1525(L)	350X316X1995(L)	350X316X2700(L)
Maximum Travel, mm	800	1000	1500	2000
Travel Duration, sec	25 sec	32 sec	48 sec	64 sec
Minimum distance for decor ceiling, mm	440mm	460mm	500mm	550mm
Maximum Projector Dimension, mm	360 x 360 x 150mm			
Bottom Plate size, mm	500x500			
Maximum Loading Capacity, kg	15 kg			
Rated voltage, V	220-240V			
Power consumption, W	60W			
Overload Protection	Fuse			
Motor	SYNCHRONOUS MOTOR			
Control Method	RF/Central Control/12V Trigger/panel			
Limit Adjustment	By 2 x Limit Switch			
Safety Protection	Emergency Stop Button			
Tilt	±22.5°			
Roll	±15°			
Color	White			
Packing Dimension, mm	530x530x260	530x530x260	530x530x300	530x530x350
Net Weight, kg	18.0 kg	18.5 kg	19.5 kg	21.0 kg
Gross Weight, kg	19.5 kg	20.0 kg	21.0 kg	22.5 kg



**Vega MFG. Ltd.**

21/F, Wyler Centre Phase II, 192-200 Tai Lin Pai Road, Kwai Chung, New Territories, Hong Kong.

T +852 2310 1138 F +852 2310 2068

generalm@vegamfg.com.hk

[www.vegamfg.com.hk](http://www.vegamfg.com.hk)