



PROJECTOR MOUNTING KITS CATALOGUE

www.vegamfg.com.hk

VEGA MFG.LTD was found in Hong Kong since early 2000. Coupled with our fully-owned ISO –certified factory in Shenzhen to back up our production, we are specialized in manufacturing a wide range of projector mounting kits and audio visual peripherals for our customers abroad on both OEM and ODM basis.

Under the management of our headquarters-VEGA Technology Ltd in Hong Kong, we follow a high level of systematization in our daily operation and at the same time supervise our factory stringently to ensure efficient production and stable product quality.

With a view to standing out in the industry we leave no stone unturned in product innovation and development to enhance our competitiveness. In practice, we keep on developing new models every year to cope with the rapid changing market and to satisfy the customers' needs.

INDEX

CEILING PROJECTOR MOUNT

PM Series	P.1
CC Series	P.2

SHORT THROW PROJECTOR MOUNT

AST Series	P.3
ST Series	P.4

PROJECTOR LIFT

SX Series	P.5
CPL Series	P.6

PROJECTOR

TROLLEY	P.7
---------------	-----

CEILING PROJECTOR MOUNT

PM SERIES

Light

Aluminum Extension pole

Rigid

Mounting bracket and legs are made of Cool Roll Steel

Safe


Every interval can be secured by screw

Adjustable

Pitch and Roll of projector are fully adjustable through the universal joint

Heavy Duty

Max. loading up to 15kg

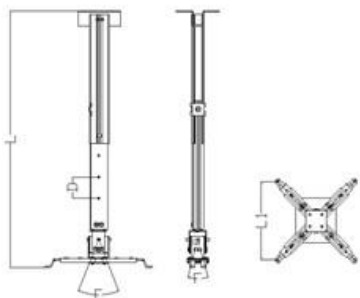

Model	PM0001	PM4365	PM63100	PM100180
Min. Length (L) / mm	110	440	620	980
Max. Length (L) / mm	110	640	940	1680
Pole Material	N.A.	Aluminum		
Height / Length Adjustment Interval / mm	N.A.	50	50	100
Max. adjustable length / mm	0	200	320	700
Product Dimension (LxWxH) / mm	125x280x102	667x280x102	1067x280x102	1787x280x102
Max. mounting hole linear distance (L1) / mm	350	350	350	350
Min. mounting hole linear distance (L1) / mm	95	95	95	95
Pitch / °	±22.5°			
Roll / °	±15°			
Yaw / °	N.A.			
Max. loading / kg	15		18	
Inner Box Dimension / mm	315x110x55	315x110x55	515x110x55	885x110x55
Net Weight per single unit / kg	0.93	1.30	1.60	2.06
Gross Weight per single unit / kg	1.05	1.40	1.70	2.26
Unit per outer carton / pcs	20			
Outer Carton Box Dimension / mm	465x335x305	465x335x305	550x470x330	920x470x330
Gross Weight per Outer Carton Box / kg	22.20	29.80	35.80	46.80
Full 20' container load / pcs	11480	11480	5760	3600

CEILING PROJECTOR MOUNT

CC SERIES

Rigid

Double layer Cool Roll steel circular extension pole

Safe


Every interval can be secured by screw

Adjustable

Pitch and Roll of projector are fully adjustable through the universal joint

Heavy Duty

Max. loading up to 20kg

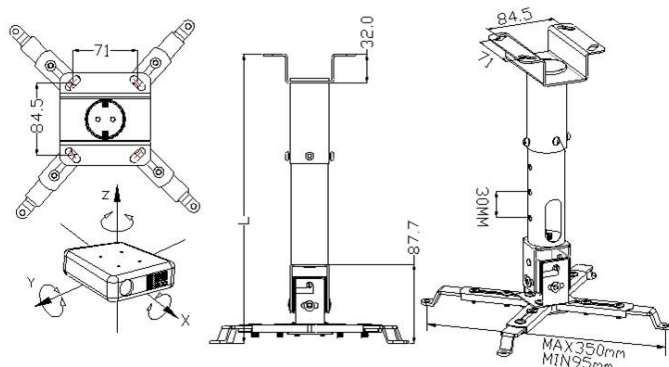

Model	CC2332	CC3250	CC5086	CC86158
Min. Length (L) / mm	230	320	500	860
Max. Length (L) / mm	320	500	860	1580
Pole Material	Steel			
Height / Length Adjustment Interval / mm	30mm			
Max. adjustable length / mm	90	180	360	720
Product Dimension (LxWxH) / mm	230X290X290	320X290X290	500X290X290	860X290X290
Max. mounting hole linear distance (L1) / mm	350			
Min. mounting hole linear distance (L1) / mm	95			
Pitch / °	±22.5°			
Roll / °	±15°			
Yaw / °	±25°			
Max. loading / kg	20			
Inner Box Dimension / mm	147x167x334	147x167x334	147x167x515	147x167x875
Net Weight per single unit / kg	1.50	1.80	2.20	3.00
Gross Weight per single unit / kg	1.80	2.20	2.70	3.80
Unit per outer carton / pcs	9			
Outer Carton Box Dimension / mm	517x457x350	517x457x350	517x457x540	517x457x890
Gross Weight per Outer Carton Box / kg	17.00	20.00	24.00	35.00
Full 20' container load / pcs	2880	2880	1800	1080

SHORT THROW PROJECTOR MOUNT

AST SERIES

Elegant

Aluminum Profile extension pole

Cable Management



Sufficient pole space to hidden all power and signal cable

Safe

Every interval can be secured by screw

Adjustable


Pitch, Roll and Yaw of projector are fully adjustable through the universal joint

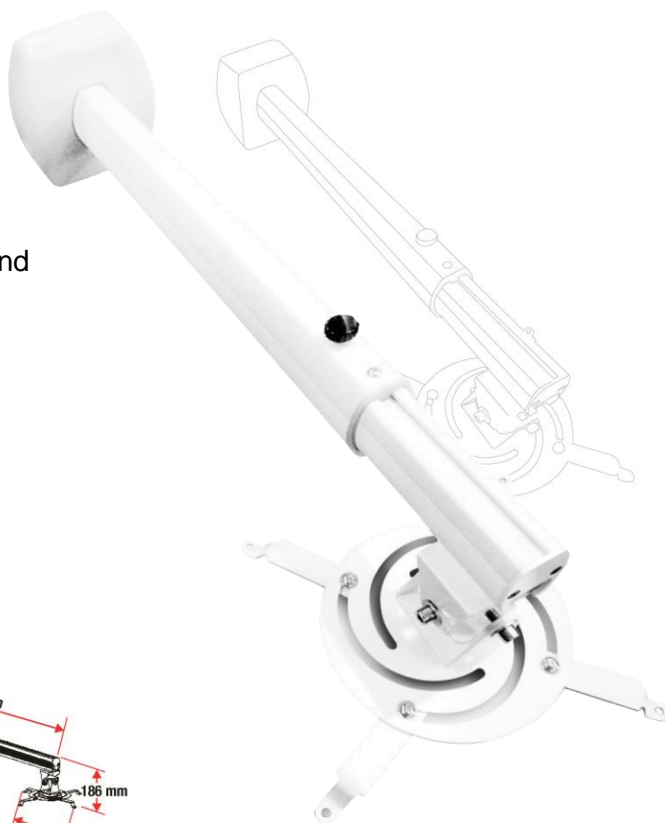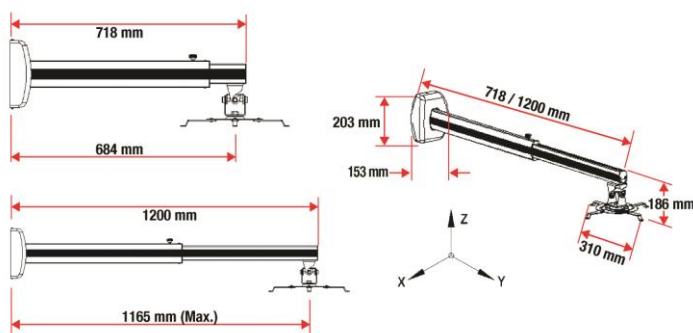

Model	AST1200	AST1250	AST1500
Min. Length (L) / mm	684	709	834
Max. Length (L) / mm	1165	1215	1465
Pole Material	Aluminum		
Height / Length Adjustment Interval / mm	N.A.		
Max. adjustable length / mm	481	506	631
Product Dimension (LxWxH) / mm	1300x310x258	1350x310x258	1600x310x258
Max. mounting hole linear distance (L1) / mm	296	296	296
Min. mounting hole linear distance (L1) / mm	255	255	255
Pitch / °	±42°		
Roll / °	±42°		
Yaw / °	±25°		
Max. loading / kg	12		10
Inner Box Dimension / mm	1030x180x110	1055x180x110	1180x180x110
Net Weight per single unit / kg	3.70	3.80	4.20
Gross Weight per single unit / kg	4.30	4.50	5.20
Unit per outer carton / pcs	6		
Outer Carton Box Dimension / mm	1055x390x350	1075x390x350	1205x390x350
Gross Weight per Outer Carton Box / kg	27.30	28.30	33.60
Full 20' container load / pcs	1080	1044	792

SHORT THROW PROJECTOR MOUNT

ST SERIES

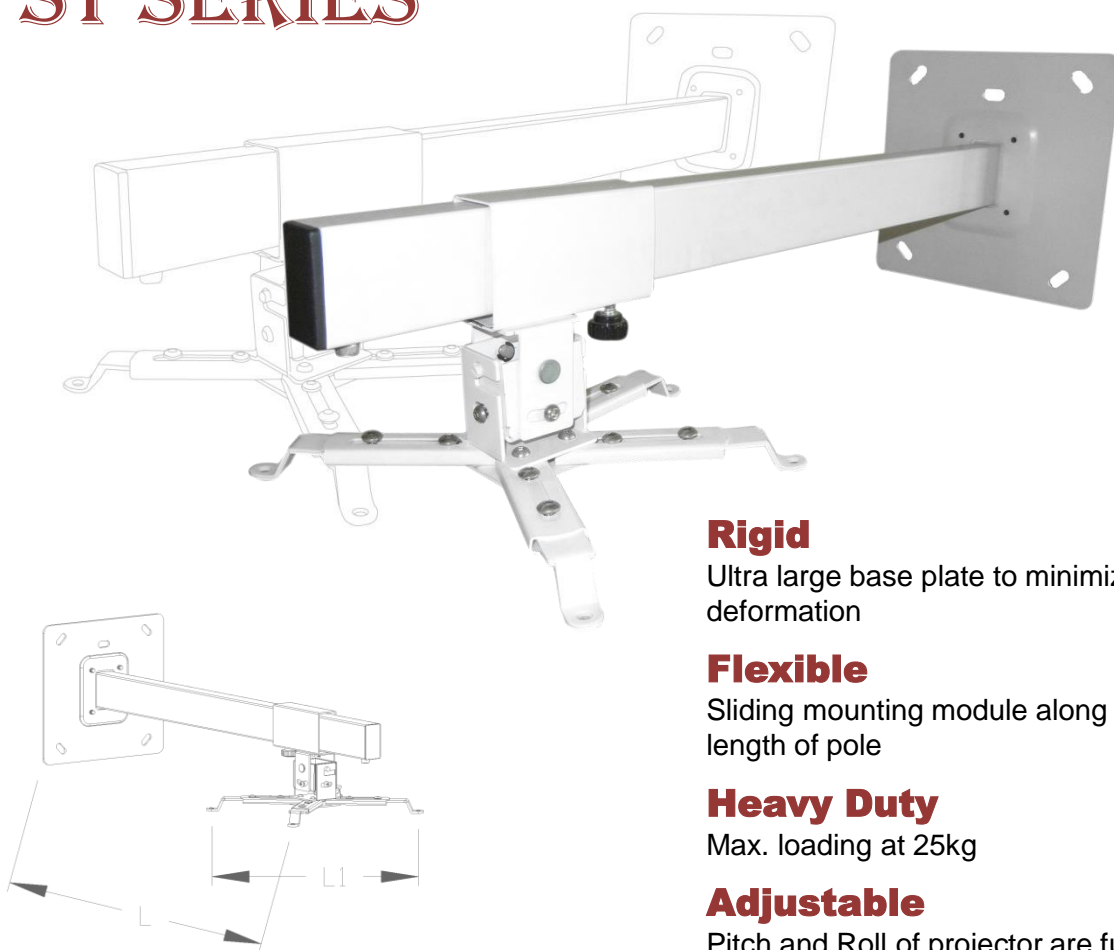

Rigid

Ultra large base plate to minimize deformation

Flexible

Sliding mounting module along full length of pole

Heavy Duty

Max. loading at 25kg

Adjustable

Pitch and Roll of projector are fully adjustable through the universal joint

Model	ST600	ST800	ST1000	ST1200	ST1500
Min. Length (L) / mm	545	745	945	1145	1445
Max. Length (L) / mm	545	745	945	1145	1445
Pole Material	Steel				
Height / Length Adjustment Interval / mm	N.A.				
Max. adjustable length / mm	545	745	945	1145	1445
Product Dimension (LxWxH) / mm	600x200X230	800x200X230	1000x200X230	1200x200X230	1500x200X230
Max. mounting hole linear distance (L1) / mm	350				
Min. mounting hole linear distance (L1) / mm	95				
Pitch / °	±22.5°				
Roll / °	±15°				
Yaw / °	±25°				
Max. loading / kg	25				
Inner Box Dimension / mm	660x212x77	860x212x77	1060x212x77	1260x212x77	1560x212x77
Net Weight per single unit / kg	3.00	3.20	3.40	3.60	3.90
Gross Weight per single unit / kg	3.20	3.40	3.60	3.80	4.20
Unit per outer carton / pcs	12	6			
Outer Carton Box Dimension / mm	1340x440x250	880x440x250	1080x440x250	1280x440x250	1580x440x250
Gross Weight per Outer Carton Box / kg	40.00	24.00	24.60	25.30	28.00
Full 20' container load / pcs	1920	1536	1200	1008	816

PROJECTOR LIFT

SX SERIES

Silent

Driven by Synchronous Motor

Total Control




RF remote control, plus Central Control and 12V trigger.

Safe

Emergency stop to isolate all input signal for safety maintenance

Adjustable



Come with universal joint projector mount for angle adjustment

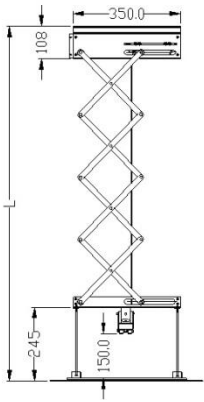

Model	SX080	SX100	SX150	SX200
Min. Size of lift(Fold up),mm	350x316x420(L1)	350X316X440(L1)	350X316X480(L1)	350X316X530(L1)
Max. Size of lift(Extended),mm	350x316x1290(L)	350X316X1525(L)	350X316X1995(L)	350X316X2700(L)
Maximum Travel, mm	800	1000	1500	2000
Travel Duration, sec	25 sec	32 sec	48 sec	64 sec
Minimum distance for decor ceiling, mm	440mm	460mm	500mm	550mm
Maximum Projector Dimension, mm	360 x 360 x 150mm			
Bottom Plate size, mm	500x500			
Maximum Loading Capacity, kg	15 kg			
Rated voltage, V	220-240V			
Power consumption, W	60W			
Overload Protection	Fuse			
Motor	SYNCHRONOUS MOTOR			
Control Method	RF/Central Control/12V Trigger/panel			
Limit Adjustment	By 2 x Limit Switch			
Safety Protection	Emergency Stop Button			
Tilt	±22.5°			
Roll	±15°			
Color	White			
Packing Dimension, mm	530x530x260	530x530x260	530x530x300	530x530x350
Net Weight, kg	18.0 kg	18.5 kg	19.5 kg	21.0 kg
Gross Weight, kg	19.5 kg	20.0 kg	21.0 kg	22.5 kg

PROJECTOR LIFT

CPL SERIES

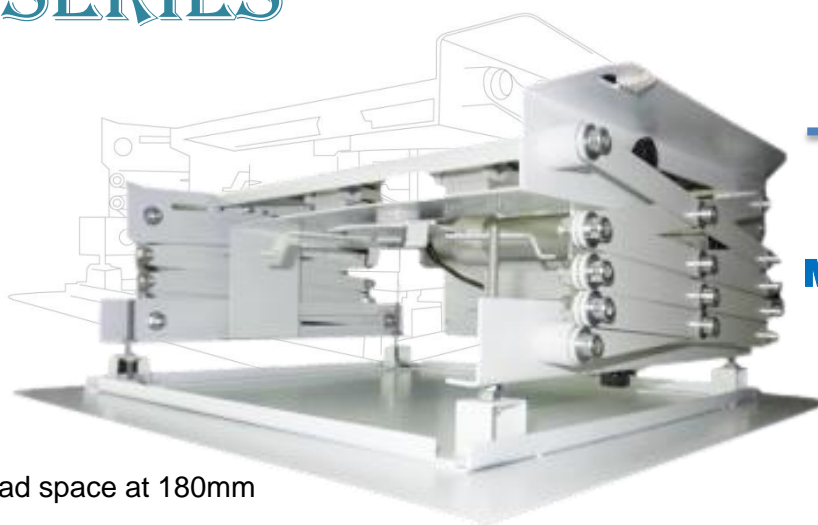

Slim

Minimum Bulkhead space at 180mm only

Silent

Driven by Synchronous Motor

Total Control


RF remote control, plus Central Control and 12V trigger.

Safe

Emergency stop to isolate all input signal for safety maintenance

Adjustable

Come with universal joint projector mount for angle adjustment

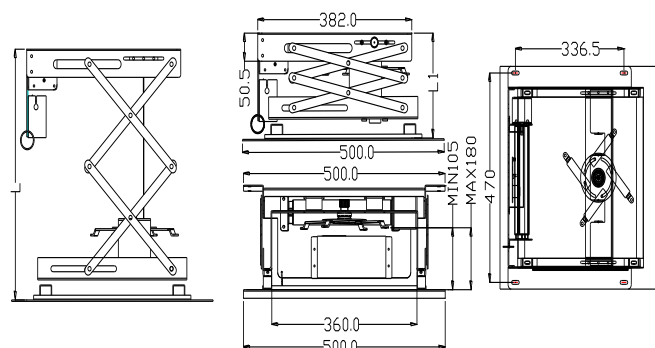

Model	CPL640	CPL860	CPL1000
Min. Size of lift(Fold up),mm	500x500x180(L1)	500X500X200(L1)	500X500X220(L1)
Max. Size of lift(Extended),mm	500x500x810(L)	500X500X1050(L)	500X500X1210(L)
Maximum Travel, mm	640mm	860mm	1000mm
Travel Duration, sec	22s	33s	40s
Minimum distance for decor ceiling, mm	180mm	200mm	220mm
Maximum Projector Dimension, mm	360 x 336 x 180mm		
Bottom Plate size, mm	500x500		
Maximum Loading Capacity, kg	12 kg		
Rated voltage, V	110-120V or 220-240V		
Power consumption, W	60W		
Overload Protection	Fuse		
Motor	SYNCHRONOUS MOTOR		
Control Method	RF/Central Control/12V Trigger/panel		
Limit Adjustment	By Limit Switch		
Safety Protection	Emergency Stop Button		
Tilt	±20°		
Roll	±20°		
Color	White		
Packing Dimension, mm	572 x 585 x 244.5mm		
Net Weight, kg	14.0 kg	14.3 kg	14.6kg
Gross Weight, kg	15.5 kg	15.8 kg	16.1kg

PROJECTOR TROLLEY

A2642

Dimension: 24"W x 18"D x 26-42"H

Shelf Size: 24"W x 18"D

Middle to bottom shelf: 15 1/2"

Adjustable Height: 26" / 30" / 34" / 38" / 42"

Weight: 42 lbs.



B2735

Dimension: 615(L) x 470(W) x 160 (H) mm

Shelf Size: 600(L) x 450(W) mm

Middle to bottom shelf: 390 mm

Adjustable Height: 695/795/895

Weight: 16 kg



TL

Dimension: 1320(L) x 450(W) x 730(H)mm

Folded dimension: 560(L) x 450(W) x 730(H)mm

Adjustable Height: 470 ~ 750 mm

Weight: 12 kg



TS

Dimension: 410(L) x 410(W) x 840(H)mm

Shelf Size: 400(L) x 400(W)

Adjustable Height: 520~800 mm

Weight: 7.7 kg



